


The SB Series Pellethane Split Repair Boots are used inside the sump to repair Total Containment Bulkheads and Conduit Penetrations. Repair boot threads directly onto existing bulkhead. Fittings can also be used to seal off ducting to allow re-pipe with double wall pipe.

**FEATURES & BENEFITS**

- Unique threaded fittings for repair of all TCI applications
- Attaches to existing bulkhead to avoid clearance issues.
- Low profile design leaves room for secondary test boot
- Boot are split and are available with or without air test

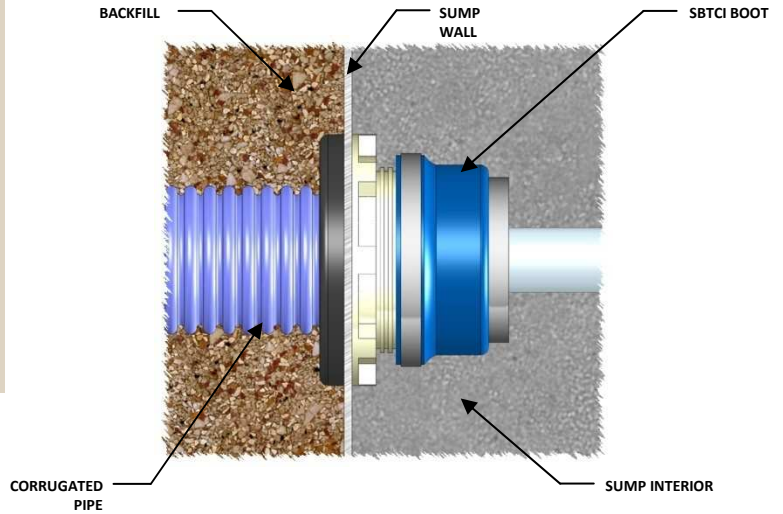

Fitting Type	Ring Dimensions	Part Number	Description	List Price
TCI	Fits existing TCI Fittings	SBTCI2.61x1.4	Split Repair Boot for Total Containment electrical conduit entry fittings 2.61x1.4	\$ 88
		SBTCI6.8x2.0	Split Repair Boot for Total Containment entry fittings. 6.8x2.0	\$ 177
		SBTCI6.8x2.0A	Split Repair Boot for Total Containment entry fittings. 6.8x2.0 <b>w/ Air Test</b>	\$ 177
		SBTCI6.8x2.25	Split Repair Boot for Total Containment entry fittings. 6.8x2.25	\$ 177
		SBTCI6.8x2.25A	Split Repair Boot for Total Containment entry fittings. 6.8x2.25 <b>w/ Air Test</b>	\$ 177
		SBTCI6.8x2.5	Split Repair Boot for Total Containment entry fittings. 6.8x2.5	\$ 177
		SBTCI6.8x2.5A	Split Repair Boot for Total Containment entry fittings. 6.8x2.5 <b>w/ Air Test</b>	\$ 177
		SBTCI6.8x2.7	Split Repair Boot for Total Containment entry fittings. 6.8x2.7	\$ 177
		SBTCI6.8x3.0	Split Repair Boot for Total Containment entry fittings. 6.8x3.0	\$ 177
		SBTCI6.8x3.0A	Split Repair Boot for Total Containment entry fittings. 6.8x3.0 <b>w/ Air Test</b>	\$ 177
		SBTCI6.8x3.5	Split Repair Boot for Total Containment entry fittings. 6.8x3.5	\$ 177
		SBTCI6.8x3.5A	Split Repair Boot for Total Containment entry fittings. 6.8x3.5 <b>w/ Air Test</b>	\$ 177
		SBTCI6.8x4.5	Split Repair Boot for Total Containment entry fittings. 6.8x4.5	\$ 177
		SBTCI6.8x4.5A	Split Repair Boot for Total Containment entry fittings. 6.8x4.5 <b>w/ Air Test</b>	\$ 177