

**Tremco Incorporated**

307 Fresh Meadows Road, Simi Valley, CA 93065



**C. Gary Wilson, CSI**  
Southwest Regional Manager  
Sealant/Weatherproofing Division

Voicemail: 800-841-0771  
Office: 805-527-4098  
FAX: 805-527-1236

Thursday, April 24, 2003

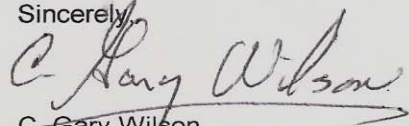
Brian Henry  
Blueline Technologies  
265 Burns Drive  
Yuba City, CA. 95991

SUBJECT: Tremco Parasealant 626  
Secondary Fuel Containment

Dear Brian:

Parasealant 626 is acceptable for use in a secondary fuel containment situation. Prolonged exposure to some fuels may cause the sealant to swell. If this occurs, the sealant should be removed using a utility knife, the concrete should be ground to virgin condition, and the Parasealant 626 sealant should be reapplied. Please do not hesitate to call if you have any additional questions. Our technical person handling the fuel containment sealant is Wayne Mazorow and can be reached at (216) 292-5058.

Sincerely,

  
C. Gary Wilson  
SW Regional Manager

cc: Wayne Mazorow - Technical Service  
Jason Pitcole - Tremco  
J. Rathmann - Tremco